





ENWALL
TECHNISCHE DATASHEET
ENW-8k-48-5k
VERSION 1.0
PUBLICATIEDATUM: 10 JUNI 2024

INTRODUCTIE:


ENWALL is Enercap's nieuwste geïntegreerde energieopslagsysteem, ontworpen voor thuis en zakelijke panden. ENWALL wordt geleverd met Enercap's gepatenteerde ENCAP en ENSERVER geavanceerde technologie. Het ENWALL systeem kan worden opgeladen door het elektriciteitsnet, zonne-energie, windenergie of generator in standalone, standalone, standalone netgekoppeld, standalone niet-netgekoppeld, hybride netgekoppeld of hybride netgekoppeld. Het kan automatisch schakelen tussen modi als de behoefte ontstaat. Door gebruik te maken van de veiligste technologie kan het systeem werken bij zeer hoge of lage temperaturen zonder dat het verwarming of koeling nodig heeft, het heeft daarnaast een zeer hoge AC en DC round trip efficiëntie. ENWALL heeft een directe aansluiting op PV (zonnepaneleninstallatie), het elektriciteitsnet, wind of GENSETS. Het systeem detecteert automatisch stroomonderbrekingen, kan uw huis of elektrische voertuig van stroom voorzien en laadt op zodra één van de ingangen beschikbaar is. ENWALL slaat energie op voor lange periodes zonder uitputting van energie door stationaire ontlading of thermische wegloop van energie.

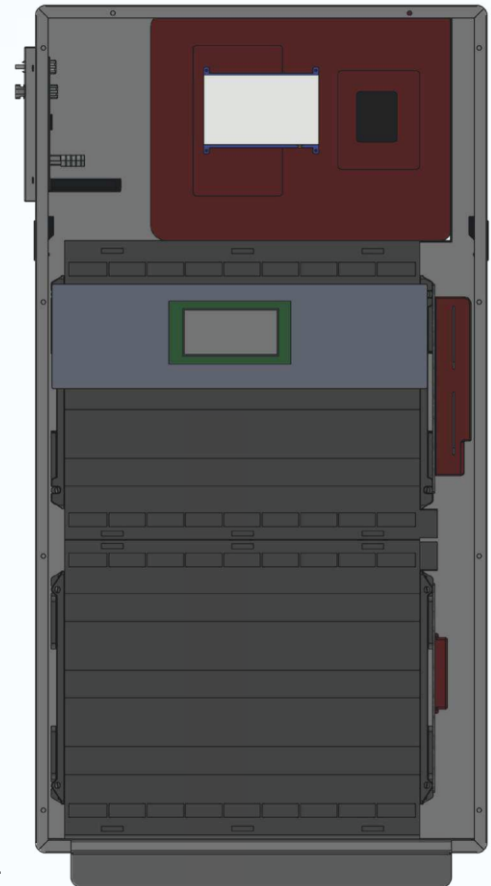


ENWALL LAYOUT:

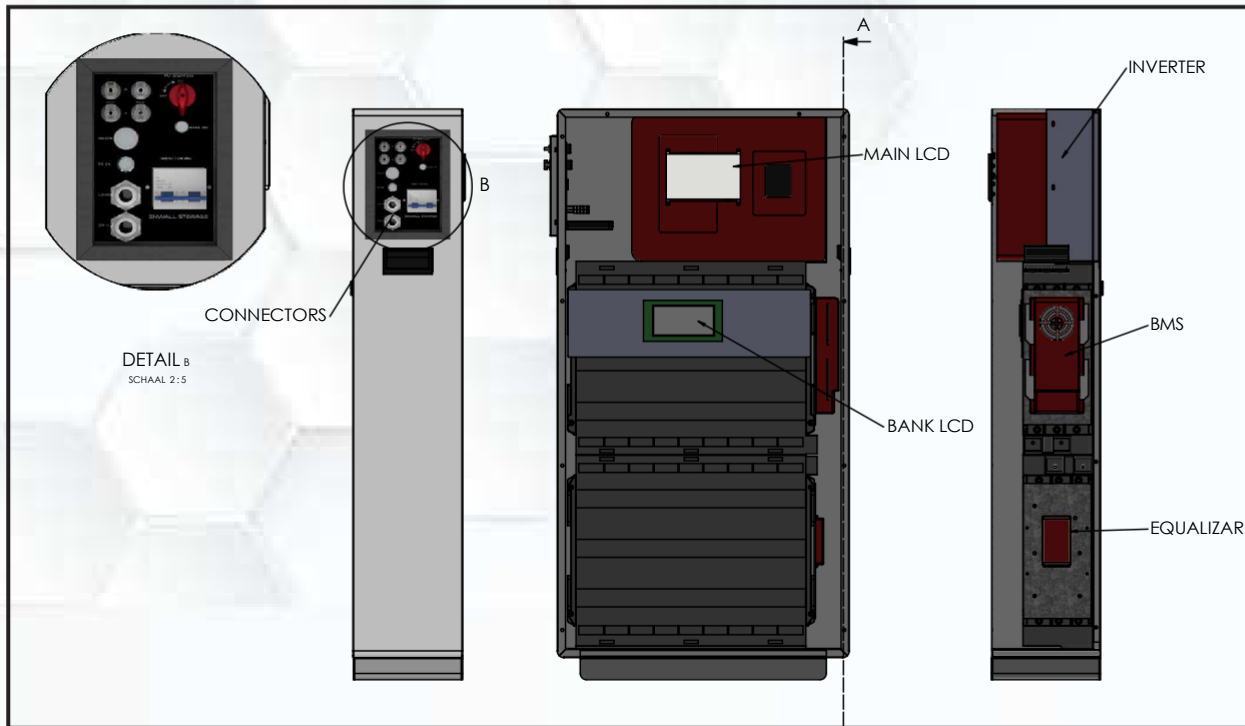

ENWALL MECHANISCHE AFMETINGEN:

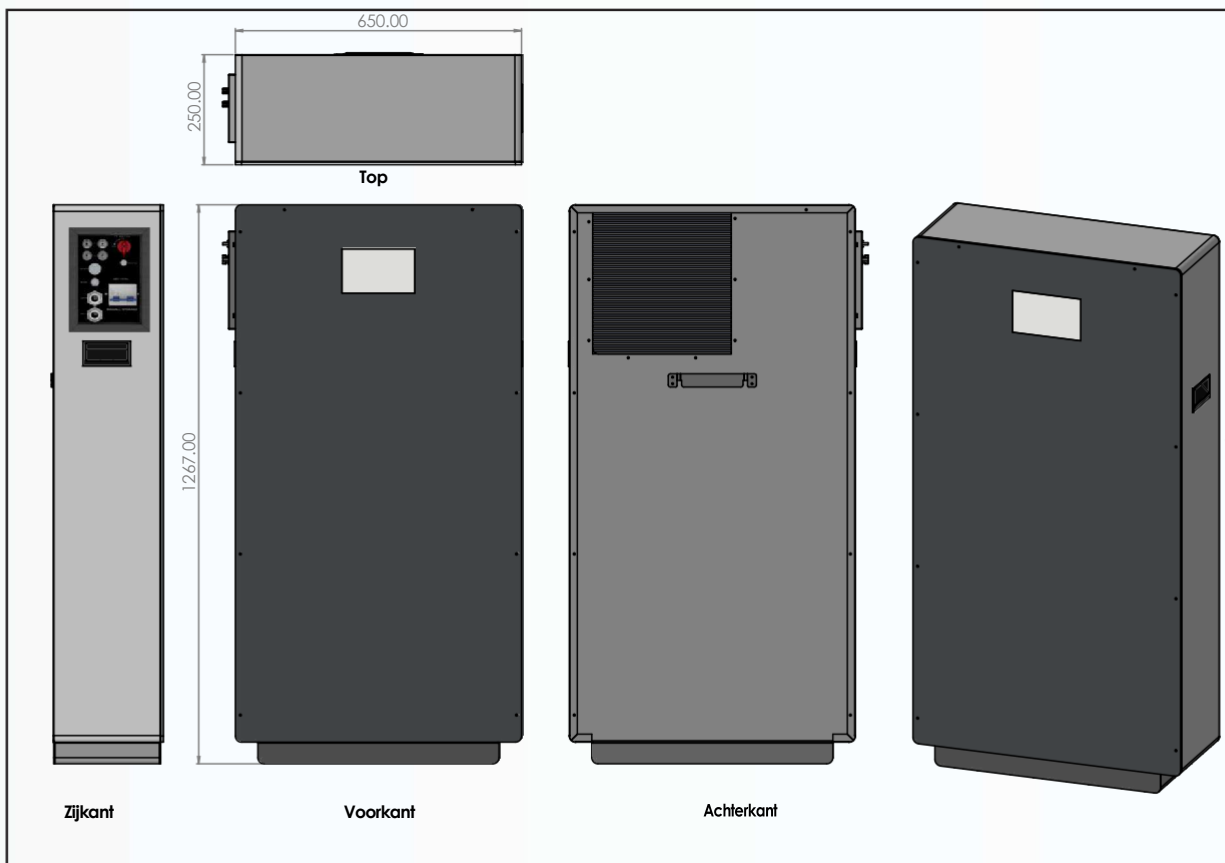

ENWALL ARCHITECTUUR:

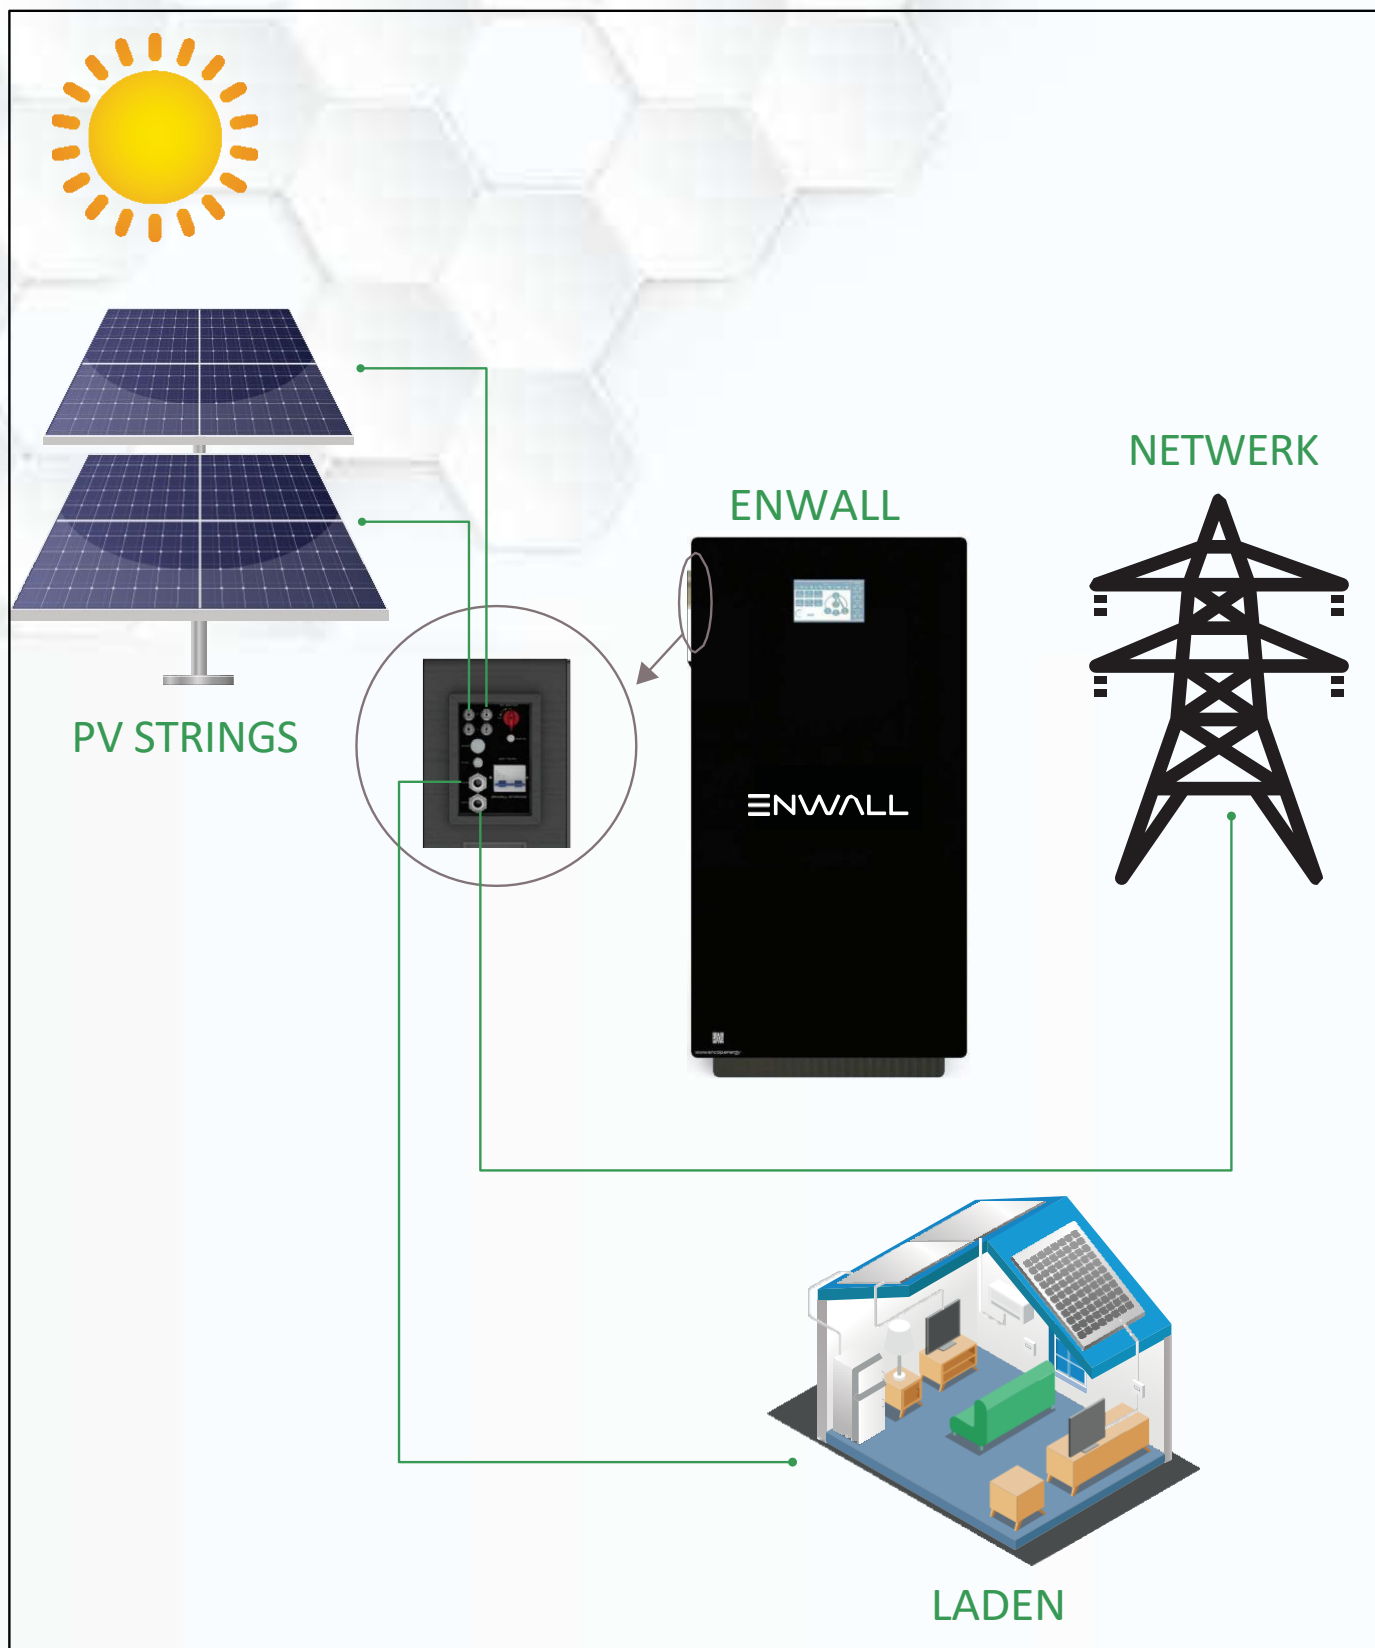

ENWALL SPECIFICATIES:

BATTERIJ PRESTATIE SPECIFICATIES

DC Energy	8kWh
Voltage Range	43.2Vdc to 60.8Vdc
DC Voltage (Nominal)	48Vdc
Internal Resistance	< 4 mili Ohms
Technology	Encapsulated Cell
Nominal Cell Voltage	6.4 ~6.6Vdc / Cell (Encapsulated) 1/2 + 0.12V Envelope
Maximum Charge Current	108A
Maximum Discharge Current	108A
Charging Curve	3 Stages / Equalization (CC/CP/VP)
Charging Strategy for Module	Self-adaption to BMS

PV STRING INPUT DATA

Max. DC Input Power(W)	6500W
PV Input Voltage(V)	370V (125V~500V)
MPPT Range(V)	150~425V
Voltagebereik DC bij volle belasting	300~425V
Start-up Voltage(V)	125V
PV Input Current(A)	26A
Max.PV Isc(A)	34A
Aantal MPPT Trackers	2
Aantal Strings Per MPPT Tracker	2

AC OUTPUT DATA	
Rated AC Output and UPS Power(W)	5000 W
Max. AC Output Power(W)	5500 VA
Peak Power(off grid)	2 times of rated power, 10 S
Rated AC Input/Output Current(A)	22.7/21.7A
Max AC Input/Output Current(A)	25/23.9A
AC Output Rated Current(A)	35A
Output Frequency and Voltage	50/60Hz; 220/230Vac (single phase)
Grid Type	Single Phase
Power Factor	0.8 leading to 0.8 lagging
Total Harmonic Distortion (THD)	<3% (of nominal power)
DC current injection	<0.5%LN
EFFICIENCY	
Max. Efficiency	97.60%
MPPT Efficiency	>99%
PROTECTION	
Battery Short Circuit Protection	Electronic Switching, Terminal Cut-off
Battery Over/under voltage	Electronic Switching, Terminal Cut-off
Battery Over Current	Electronic Switching, Terminal Cut-off
Battery Over temperature	Electronic Switching, Terminal Cut-off

<p>Integrated Equipment Protection</p>	<p>DC Polarity Reverse Connection Protection, AC Output Over Current Protection AC Output Over Voltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Over voltage Load Drop Protection, Residual Current (RCD) Detection, Surge protection level</p>
<p>Surge Protection Level</p>	<p>TYPE II(DC),TYPE II(AC)</p>
<p>S M A R T F E A T U R E S</p>	
<p>OLED Display</p>	<p>Monitor & Configure Module</p>
<p>Communication</p>	<p>WIFI / CANBUS / Bluetooth</p>
<p>Alarm</p>	<p>Buzzer alarm in the event of Over/under-Voltage, Over-Current, Over Temperature</p>
<p>EN-CONNECT SOFTWARE</p>	
<p>Module Monitoring</p>	<p>Total Voltage, Individual Cell Voltages, Current, Temperatures, Instantaneous Power, SOC and Energy Consumed</p>

ENVIRONMENTAL SPECIFICATIONS

Cell Operating Temperature	-30°C~ +70°C
Operating Humidity	Non-Condensing
Warehousing	Can be stored at any SOC without affecting cycle life

MECHANICAL SPECIFICATIONS

Dimensions (W x H x D) mm	659 x 1267 x 250
Weight (Kg)	125
Module Casing Material	GI Powdered
Installation Style	Wall Mounted

ENWALL SCHEMATISCH DIAGRAM

